

The PLASCO Line of Paint, Varnish and Enamel Products »

PLASCO FLAT WALL PAINT

A durable, soft sheen, washable wall paint for plaster, wallboard or composition walls and ceilings.

PLASCO FLOOR PAINT

For all types of interior floors and woodwork — quick drying — economical.

PLASCO READY MIXED PAINT

Of good quality for general exterior painting.

PLASCO SEMI-GLOSS ENAMEL

A durable, washable low gloss enamel for kitchen, hall and bathroom walls and ceilings.

PLASCO UTILITY ENAMEL

For furniture, woodwork, toys, farm implements — in fact, for all general purposes.

PLASCO VARNISH AND ENAMEL

A complete line of medium priced varnishes for all general purposes.

PLASCO VARNISH STAINS

To renew furniture and woodwork — stains and varnishes in one operation.

PLASCO

REG. U. S. PAT. OFF.

FLOOR PAINT



PITTSBURGH
PLATE GLASS COMPANY
PAINT-VARNISH-LACQUER

PLASCO FLOOR PAINT

Plasco Floor Paint is a suitable finish for all types of interior floors. It is resistant to moisture and abrasion and produces a smooth uniform coating with a good gloss. Quick drying and economical. May be used on upright surfaces if desired.

DIRECTIONS FOR USE


Stir Contents Thoroughly
From the Bottom

Surface to be painted must be dry and free from loose particles, dirt, wax or grease. Use turpentine or naphtha to



LEAD

24-1

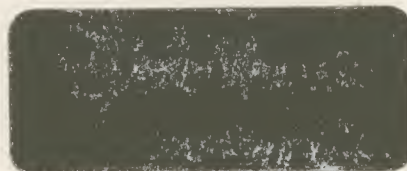

STONE

24-2



SAND

24-3




OAK

24-4



LEATHER

24-5

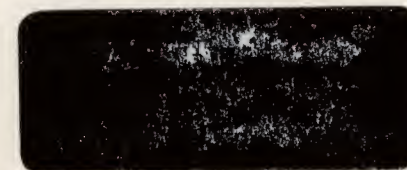

MAHOGANY

24-6

remove wax or grease. Old high gloss painted surfaces should first be roughened with steel wool or sandpaper before recoating.

For REPAINTING two coats are recommended. For NEW WORK three coats will give best results. For first coat add from one pint to one quart of Leptyne or Turpentine to the gallon of paint. For second and third coats use as received.

Sets dust free in two hours and is ready for recoating in four to six hours depending on drying conditions.

(LINE 24 — 1/21/35)

Successful painting requires the use of a proper brush.

Use a Gold Stripe Brush